
American Black Walnut



This timber makes a captivating, distinctive floor with natural lustre and a beautiful grain pattern.

Please contact our showrooms for more information and samples.



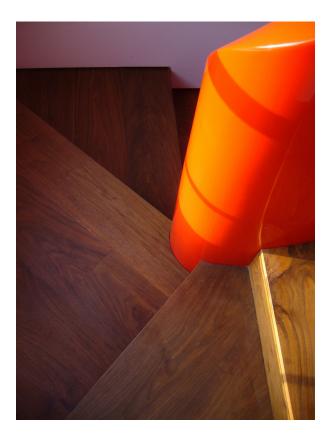

Planks: From £99 sqm

Widths available: 140mm, 180mm, 220mm Thickness available: 15 & 20mm Duplex engineered

Herringbone & Chevron: From £131.50 sqm

Sizes available: 120 x 600mm Thickness available: 15 & 20mm Duplex engineered

Technical Specifications

| SPECIES APPLICATION CONSTRUCTION | European oak Commercial and residential (Indoor) Duplex engineered 4 & 6mm top layer oak Solid oak |
|--|---|
| BEVEL | Micro Bevel as standard |
| INSTALLATION TECHNIQUE | Nail, glue bonded or floating |
| SUITABLE FOR UFH | Yes, when duplex engineered |
| FIRE CLASSIFICATION | EN: 13501: Dfl-S1 |
| THERMAL CONDUCTIVITY | 0.119-0.17 λ W/mK |
| HARDNESS | 4,982 N (Janka) |
| | |

Timber floors are easy to care for, please call us for further information on the best way to look after your floor.

Timber is a living material. A wooden floor, although no longer growing as part of a tree, is still very much part of its environment. As such, it responds to the light, temperature, humidity and wear to which it is exposed.

As the floor ages the colour of the wood will mellow and change. This is a natural process that occurs as the surface of the wood is exposed to oxygen in the air and to ultraviolet light from the sun. Painted surfaces, upholstery, furniture and rugs all undergo this same process over time.

After a number of years you may wish to have the floor surface sanded down and refinished. You could then choose to re-oil the floor or have it stained first or even refinished in lacquer.



West: 61 Paddington St London W1U 4JD 020 7486 4838 East: 7a Ezra Street London E2 7RH 020 7221 8188