

MAFI



These Austrian-crafted wood floors meet the highest standards of quality and stability.

MAFI's symmetrical 3-layer construction, with matching top and bottom layers, ensures optimum stability, perfect for underfloor heating. Made with natural adhesives and finished in linseed oil, they feature an open-pore surface for a healthier indoor environment. Easy to clean with soap and water, they're the ideal choice for those seeking a truly natural interior.

Oak



Extreme White



White



Grey



Volcano Grey




Graphite



Natural




Riva Mezzo

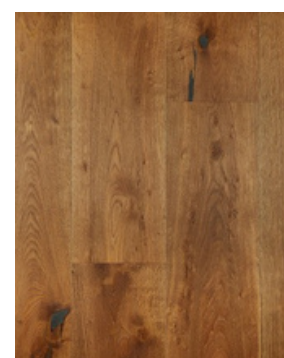

Volcano I



Riva Mare

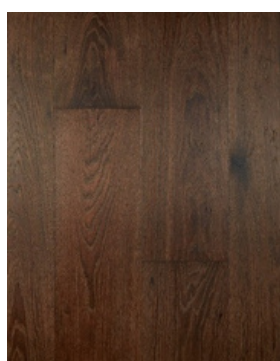

Volcano II



Volcano III

Planks from: £139m²

Widths available: 160mm, 190mm, 245mm, 260mm, 280mm, 300mm.

Thickness available: 16mm & 19mm

3-layer engineered timber

Herringbone & Chevron: From £154m²

Herringbone: 160mmx 580mm, 190mmx780mm, 245mmx980mm

Chevron: 160mmx580mm, 160mmx600mm, 190mmx580mm, 190mmx600mm

Thickness available: 16mm & 19mm

3-layer engineered timber


Not all colours available in Herringbone & Chevron.

Prices do not include VAT or delivery

Other Species



White Ash

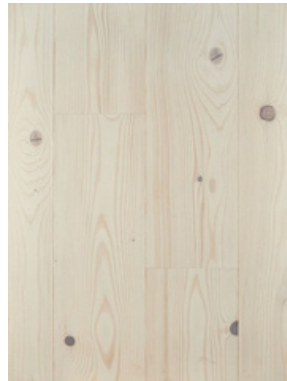

White Fir



Ash Volcano



Larch End Grain



Black Walnut Oiled

Planks from: £114m²

Widths available: 155mm, 185mm, 200mm, 220mm, 240mm, 260mm, 280mm, 300mm

Thickness available: 16mm & 19mm

3-layer engineered timber

Herringbone & Chevron: From £184m²

Herringbone: 155mm x 580/780mm, 185mm x 580/780mm

Chevron: 155mmx540/730mm, 155mmx550/740mm, 185mmx710mm, 185mmx550/740mm,

Thickness available: 16mm & 19mm

3-layer engineered timber

Not all species available as Herringbone & Chevron.

Prices do not include VAT or delivery

Technical Specifications

SPECIES	European oak & other species
CERTIFICATION	Upon Request
APPLICATION	Commercial and residential (Indoor)
CONSTRUCTION	3 Layer engineered: 4mm top and bottom layer oak with 8 or 11mm softwood core
BEVEL	Micro bevel as standard
INSTALLATION TECHNIQUE	Nail, glue bonding or floating
SUITABLE FOR UFH	Yes
FIRE CLASSIFICATION	EN: 13501: Dfl-S1
THERMAL CONDUCTIVITY	0.119-0.17 λ W/mK
HARDNESS	Oak: 4,982 N (Janka). Other Species available on request

Timber floors are easy to care for, please call us for further information on the best way to look after your floor.

Timber is a living material. A wooden floor, although no longer growing as part of a tree, is still very much part of its environment. As such, it responds to the light, temperature, humidity and wear to which it is exposed.

As the floor ages the colour of the wood will mellow and change. This is a natural process that occurs as the surface of the wood is exposed to oxygen in the air and to ultraviolet light from the sun. Painted surfaces, upholstery, furniture and rugs all undergo this same process over time.

After a number of years you may wish to have the floor surface sanded down and re-finished. You could then choose to re-oil the floor or have it stained first or even re-finished in lacquer.