


Oak County



A classic collection of engineered oak floors with a variation of textures for interiors where a characterful floor is desired.

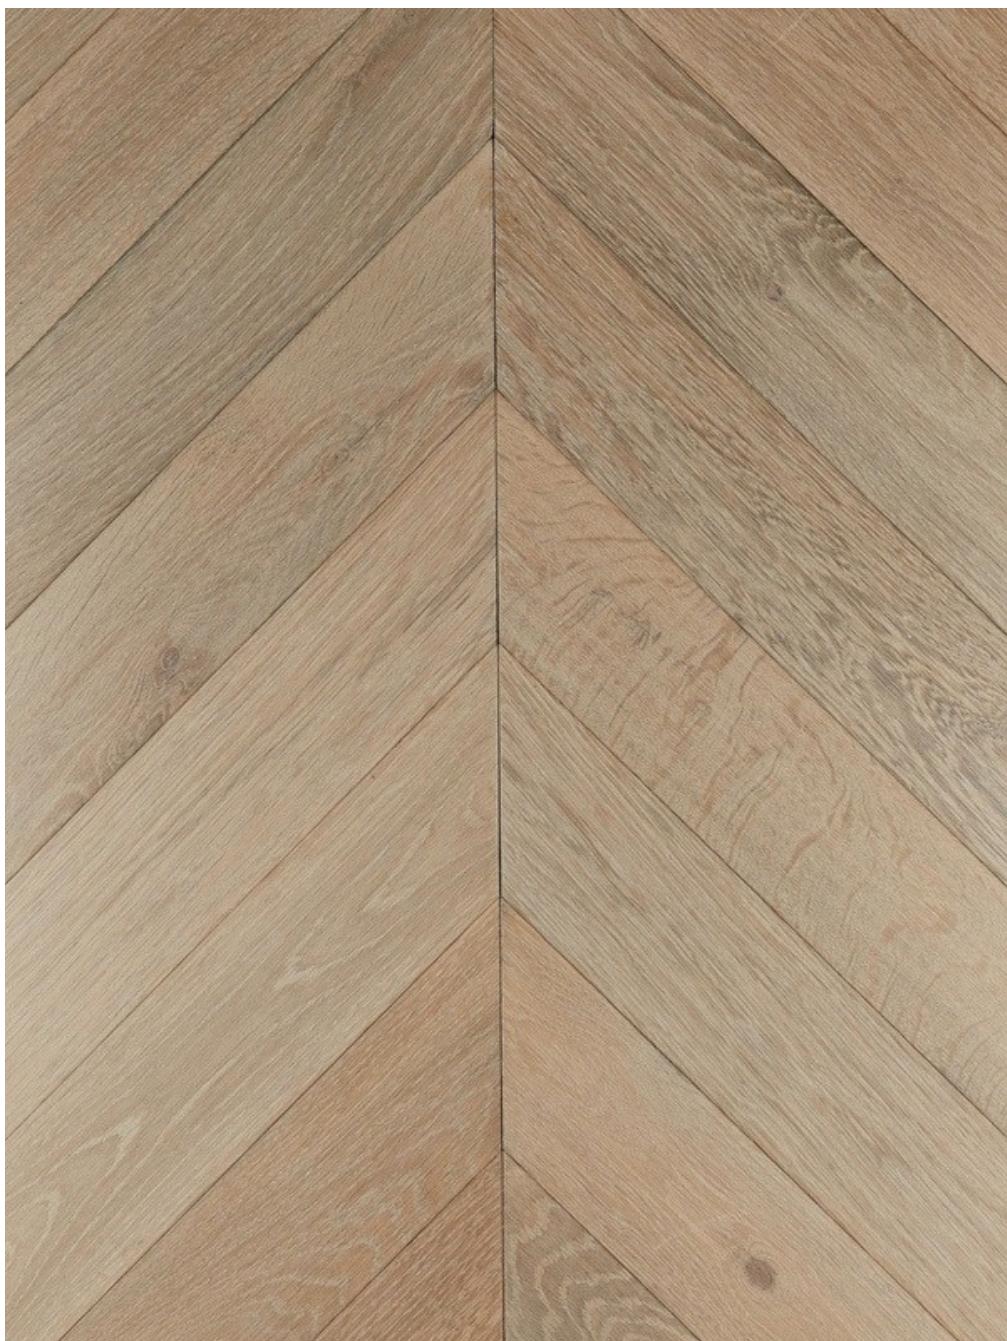

Cornwall



Dorset



Norfolk



Down



Tyrone



Cheshire



Antrim




Somerset



Cumbria



Yorkshire

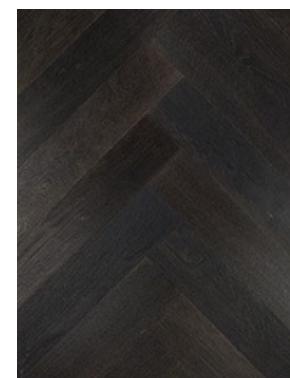

Rutland



Lincolnshire

Planks from: £109 sqm

Widths available: 160mm, 185mm, 190mm, 220mm, 250mm, 260mm

Thickness available: 16 and 20mm

Duplex engineered

Herringbone & Chevron: From £129 sqm

Sizes available: Herringbone 100mm x 600mm, Chevron 100mm x 500mm

Thickness available: 15mm

Duplex engineered

Prices do not include VAT or delivery

Technical Specifications

| | |
|-------------------------------|--|
| SPECIES | European oak |
| CERTIFICATION | Not Certified |
| APPLICATION | Commercial and residential (Indoor) |
| CONSTRUCTION | Duplex engineered 4 or 6mm top layer oak |
| BEVEL | Micro bevel as standard |
| INSTALLATION TECHNIQUE | Nail, glue bonding or floating |
| SUITABLE FOR UFH | Yes, when duplex engineered |
| FIRE CLASSIFICATION | EN: 13501: Dfl-S1 |
| THERMAL CONDUCTIVITY | 0.119-0.17 λ W/mK |
| HARDNESS | 4,982 N (Janka) |

Timber floors are easy to care for, please call us for further information on the best way to look after your floor.

Timber is a living material. A wooden floor, although no longer growing as part of a tree, is still very much part of its environment. As such, it responds to the light, temperature, humidity and wear to which it is exposed.

As the floor ages the colour of the wood will mellow and change. This is a natural process that occurs as the surface of the wood is exposed to oxygen in the air and to ultraviolet light from the sun. Painted surfaces, upholstery, furniture and rugs all undergo this same process over time.

After a number of years you may wish to have the floor surface sanded down and re-finished. You could then choose to re-oil the floor or have it stained first or even re-finished in lacquer.