
Oak County



A classic collection of engineered oak floors suitable for all interiors

This collection of floors is available in a variety of options: smooth sanded finishes, open grain brushing, or aged appearances with broken edges offering character floors with a time-worn appearance.

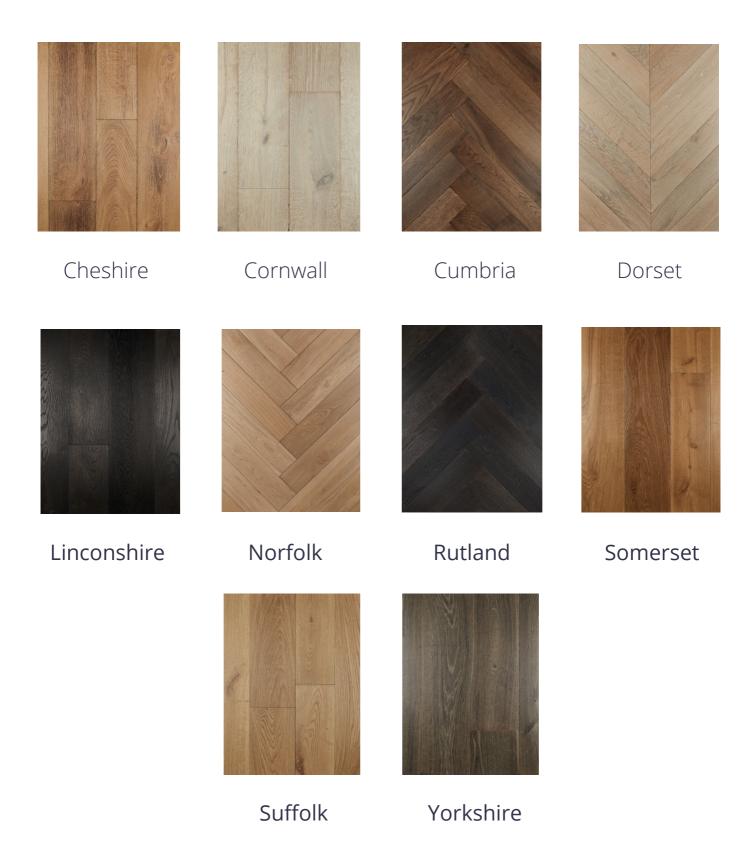

Planks from: £104 sqm ex VAT

Widths available: 160mm, 185mm, 190mm, 220mm, 250mm, 260mm

Thickness available: 16 and 20mm

Duplex engineered

Herringbone & Chevron: From £124 sqm

Sizes available: Herringbone 100mm x 600mm, Chevron 100mm x 500mm

Thickness available: 15mm

Duplex engineered

Technical Specifications

SPECIES European oak
CERTIFICATION Not Certified

APPLICATION Commercial and residential (Indoor)

CONSTRUCTION Duplex engineered 4 or 6mm top layer oak

BEVEL Micro bevel as standard

INSTALLATION TECHNIQUE
SUITABLE FOR UFH

Nail, glue bonding or floating
Yes, when duplex engineered

FIRE CLASSIFICATIONEN: 13501: Dfl-S1THERMAL CONDUCTIVITY0.119-0.17 λ W/mKHARDNESS4,982 N (Janka)

Timber floors are easy to care for, please call us for further information on the best way to look after your floor.

Timber is a living material. A wooden floor, although no longer growing as part of a tree, is still very much part of its environment. As such, it responds to the light, temperature, humidity and wear to which it is exposed.

As the floor ages the colour of the wood will mellow and change. This is a natural process that occurs as the surface of the wood is exposed to oxygen in the air and to ultraviolet light from the sun. Painted surfaces, upholstery, furniture and rugs all undergo this same process over time.

After a number of years you may wish to have the floor surface sanded down and refinished. You could then choose to re-oil the floor or have it stained first or even refinished in lacquer.

