

Oak Crown



The Crown range is designed to replicate the appearance of genuine century-old antique floors.

Boards are deeply wire-brushed and feature an undulating surface with subtle height variations that reflect natural wear patterns.

Discoloration around the knots enhances the wood's character and texture, giving the floor the appearance of well-aged, historic timber. Despite its traditional aesthetic, the Crown range meets all modern performance and durability standards.


This range is particularly created for specialists in heritage projects and for those seeking an authentic, historically inspired oak floor. Certain finishes are treated with hard wax oil, while others are lacquered, providing surfaces that are durable, easy to clean, and simple to maintain.



Canmor



Godwin

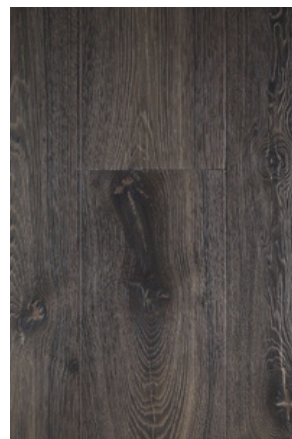

Lancaster



Norman



Powis



Tudor



Windsor

Planks: From £189m²

Widths available: Mixed widths 140mm, 180mm, 220mm, 220mm, 260mm, 300mm

Thickness available: 20mm & 22mm

Duplex engineered or Solid timber

Rustic grade

Herringbone & Chevron: From £244m²

Sizes available: 120mm x 720mm, 120mm x 650mm

Thickness available: 22mm

Solid timber

Rustic grade

Versailles Panel: POA

Size available: 1020 x1020mm

Thickness available: 22mm

Solid timber

Extra Rustic grade

Prices do not include VAT or delivery

Technical Specifications

SPECIES	European oak
APPLICATION	Commercial and residential (Indoor)
CONSTRUCTION	Solid Oak or duplex engineered 6mm top layer oak
BEVEL	Hand scraped as standard
INSTALLATION TECHNIQUE	Nail, glue bonding or floating
SUITABLE FOR UFH	Yes, when duplex engineered
FIRE CLASSIFICATION	EN: 13501: Dfl-S1
THERMAL CONDUCTIVITY	0.119-0.17 λ W/mK
HARDNESS	4,982 N (Janka)

Timber floors are easy to care for, please call us for further information on the best way to look after your floor.

Timber is a living material. A wooden floor, although no longer growing as part of a tree, is still very much part of its environment. As such, it responds to the light, temperature, humidity and wear to which it is exposed.

As the floor ages the colour of the wood will mellow and change. This is a natural process that occurs as the surface of the wood is exposed to oxygen in the air and to ultraviolet light from the sun. Painted surfaces, upholstery, furniture and rugs all undergo this same process over time.

After a number of years you may wish to have the floor surface sanded down and re-finished. You could then choose to re-oil the floor or have it stained first or even re-finished in lacquer.



EAST:
Unit 7
11-29 Fashion Street
London E1 6PX
020 7221 8188

WEST:
61 Paddington St
London W1U 4JD
020 7486 4838

Registered in England & Wales: Solid Floor Ltd. Unit 7, 11-29 Fashion Street, London E1 6PX
Company Reg No: 03287805 | VAT Reg No: 710 4793 50
FSC licence: C117337 | FSC COC: CU-COC-828136 | PEFC COC: CU-PEFC-828136
solidfloor.co.uk team@solidfloor.co.uk  solidfloor  solidfloor