

Oak Tate



Visible saw marks on the surface of the oak give the Tate its distinctive vibrant texture producing a stylish floor bursting with energy, character and vitality.

It is no surprise that it is a firm favourite amongst interior designers and architects. Don't be fooled by its industrial look, this floor delivers an exquisite foundation for any scheme; contemporary, period, or minimalist. Available in a range of tones and widths, as well as parquet, this special floor offers boundless possibilities.



Arran



Bute




Citadel



Iona



Islay

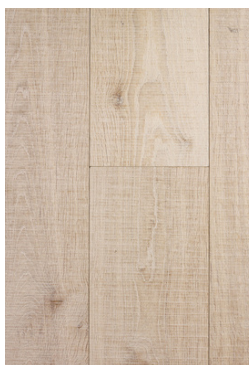

Skye



Tiree



Uist

Planks: From £114 sqm

Widths available: 145mm, 185mm, 225mm, 245mm, 285mm

Thickness available: 15mm, 20mm

Solid or duplex engineered

Herringbone & Chevron: From £134 sqm

Sizes available: 85 x 425mm, 105 x 525mm, 145 x 580mm, 145 x 725mm, 185 x 925mm

Thickness available: 15mm, 20mm

Solid or duplex engineered

Parquet Panels: From £179 sqm

Ten Patterns available in set sizes

Thickness available: 20mm

Solid or duplex engineered

Technical Specifications

SPECIES	European oak
CERTIFICATION	Duplex engineered: FSC® Mix 70% Solid: FSC 100%
APPLICATION	Commercial and residential (Indoor)
CONSTRUCTION	Duplex engineered 4 or 6mm top layer oak Solid oak
BEVEL	Micro bevel as standard
INSTALLATION TECHNIQUE	Nail, glue bonding or floating
SUITABLE FOR UFH	Yes, when duplex engineered
FIRE CLASSIFICATION	EN: 13501: Dfl-S1
THERMAL CONDUCTIVITY	0.119-0.17 λ W/mK
HARDNESS	4,982 N (Janka)

Timber floors are easy to care for, please call us for further information on the best way to look after your floor.

Timber is a living material. A wooden floor, although no longer growing as part of a tree, is still very much part of its environment. As such, it responds to the light, temperature, humidity and wear to which it is exposed.

As the floor ages the colour of the wood will mellow and change. This is a natural process that occurs as the surface of the wood is exposed to oxygen in the air and to ultraviolet light from the sun. Painted surfaces, upholstery, furniture and rugs all undergo this same process over time.

After a number of years you may wish to have the floor surface sanded down and re-finished. You could then choose to re-oil the floor or have it stained first or even re-finished in lacquer.

All of these products are FSC® certified



West:
61 Paddington St
London W1U 4JD
020 7486 4838

East:
7a Ezra Street
London E2 7RH
020 7221 8188

Registered in England & Wales: Solid Floor Ltd. 7a Ezra Street, London E2 7RH
Company Reg No: 03287805 | VAT Reg No: 710 4793 50
FSC® licence: C117337 | FSC COC: CU-COC-828136 | PEFC COC: CU-PEFC-82813
solidfloor.co.uk sales@solidfloor.co.uk  solidfloor  solidfloor

